

Secondary Framing




Structural sections are manufactured using ASTM A 1011 grade 50, class 2 (55 KSI minimum yield) with a red oxide finish or ASTM A 653 grade 50, class 2 (55 KSI min yield) with a G90 galvanized finish. Cee or Zee shapes with web depths of 4", 6", 8", 9", and 12" in a variety of symmetrical or unsymmetrical flanges. Special shape single or double slope, high side or low side eave struts are available.

A variety of angles, channels, and hat sections are also available, please inquire.


CEES AND ZEES



EAVE STRUTS

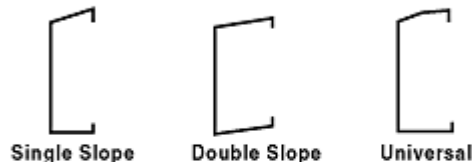

CHANNELS, HAT SECTIONS, and BASE ANGLES

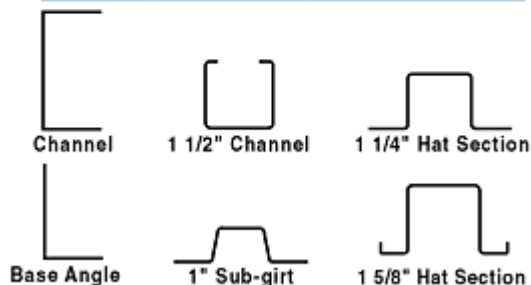

Other components are available. Please inquire.