


PBR & R-Panel

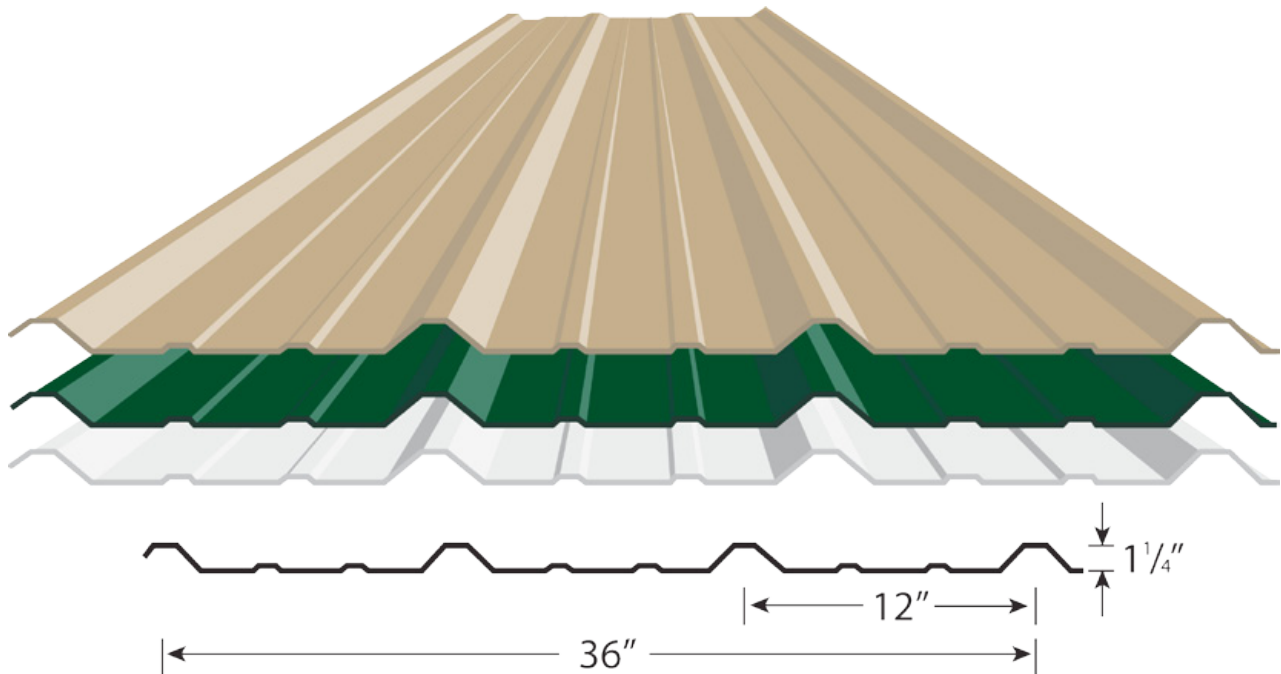

Minimum Slope 1/2: 12
Spacing: 4' or 5' Maximum purlin spacing
Approved fastener: #12 x 1-1/4" Driller and 1/4 x 7/8" Lap Tek

26ga Roof = PBR: Galvalume and White*

26ga Wall = R: Galvalume, Polar White*, Rustic Red*, Evergreen,
 Light Stone*, Ash Gray, Charcoal Gray, Colony Green*

Finish Warranty Valspar WeatherX SR – Siliconized Polyester coating 40yr limited

2007 Florida Building Code Product approvals:

FL8319.1 PBR Roof 26ga over open purlin

FL8347.1 PBR / R Wall 26ga over open purlin

Job Specific Engineering is available for alternate substrates as needed.

Notes:

24ga available on special order!

Additional Colors available upon request.

* = Energy Star Approved